




# HT-30C

Three-side Trimmer

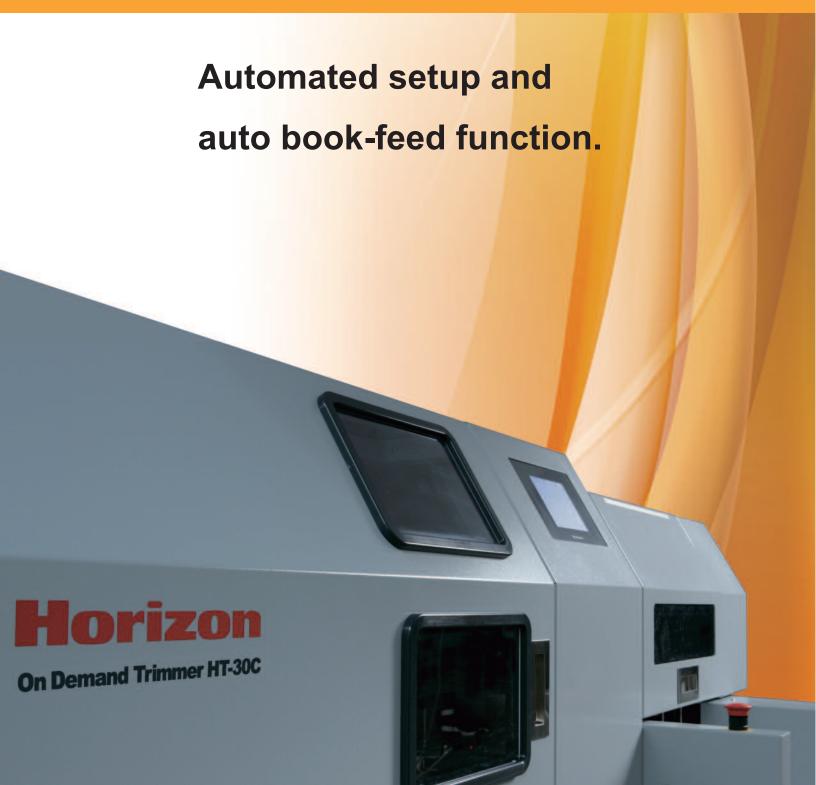

# Three-side Trimmer HT-30C

#### **Innovative Three-side Trimmer**

The new HT-30C three-side trimmer trims three sides of a book with a single knife. A pressure clamp holds and rotates the books for sequential top, fore-edge, and bottom trimming.

#### **Robotic Trimming**

The operator simply inputs untrimmed and trimmed book size at the color touchscreen. The HT-30C then performs all necessary setups automatically, and transports and trims each book.

#### **Highly Accurate Finishing**

Precise servo motors are employed for knife positioning to insure high quality trimming. The servo controlled hydraulic unit adjusts pressure automatically for markless trimming.

#### **Nonstop Trimming**

If the book dimensions are same, the HT-30C can trim books of different thickness continuously. Maximum trim thickness is 51 mm / 2.0".

#### **Powerful Trimming**

Knife operation and book clamping are hydraulic controlled for safe and powerful trimming.

#### **Safety Operation**


The trimming section, feed table, and stacker are all interlocked and safety covered for maximum operator safety.

#### Manage your bindery with pXnet


The optional pXnet bindery control system makes job scheduling and tracking for the HT-30C super efficient, or accept JDF setup data from an upstream workflow.

# Simply set up the HT-30C through the color touchscreen and place the books on the feed table. Books are automatically transported through the process for accurate, professional trimming.




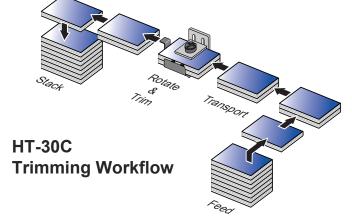

## Trim Size

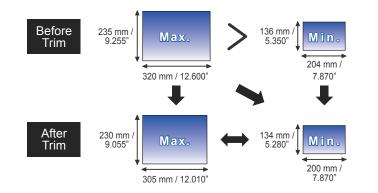

# Robotic Trimming



Book Feeding Book Transportation

The innovative HT-30C three-side trimmer performs book feeding, trimming, and stacking with full automation. You simply place a stack of books on the in-feed table. A suction feed system brings the books into position, where they are


### 1 High Capacity Feed Table


The in-feed table can accept a maximum pile of 300 mm / 11.8". Books prepared on this table are transported to the trimming section automatically.



# 3 Accurate Trimming

Precise servo motors are employed for accurate knife positioning and high quality trimming. The servo controlled hydraulic unit also adjusts pressure automatically depending on book size to ensure markless trimming. The







Rotation

Trimmin

gripped by a robotic arm which advances the block for downstream processing. The HT-30C can run unattended once it is setup and started, so the operator is free to perform book binding or other tasks.

### 2 User-friendly Operation

The icon-based color touchscreen provides simple operation. First, input the untrimmed book size and then trimmed book size. Next, input the production speed and how many books are to be trimmed at once. Prepare the books on the feed table and start



Operation Screen

operation. No special operator skills are required. Up to 40 job setups can be stored into memory for easy job recall.

# 4 High Capacity Stacker

Trimmed books are delivered to the stacker which features a 300 mm / 11.8" maximum pile height. The stacker section is covered for safety, but a viewing window allows the operator to monitor books in progress.



# 5 Easy Maintenance

Single knife trimming system reduces knife replacement time to 1/3 of normal three-knife trimmer. The HT-30C is equipped with a tungsten-carbide tipped trim knife for longer life. Knife and cutting stick replacement are easily performed from the rear sliding door.





HT-30C Major Specifications		
Untrimmed Book Size	11-300 N	Spine Length × Fore-edge Length  Max. 320 x 235 mm / 12.600" x 9.255"  Max. 320 x 305 mm / 12.600" x 12.010"  at maximum by using the optional cutting module for landscape size  Max. 320 x 233.8 mm / 12.600" x 9.200"  at maximum by using the optional cutting module for A6 size  Min. 204 x 136 mm / 7.870" x 5.350"  Min. 152 x 136 mm / 5.985" x 5.350"  at minimum by using the optional cutting module  Min. 152 x 107 mm / 5.985" x 4.210"  at minimum by using the optional cutting module for A6 size
Finished Book Size		Spine Length × Fore-edge Length Max. $305 \times 230 \text{ mm} / 12.010^{\circ} \times 9.055^{\circ}$ Max. $305 \times 300 \text{ mm} / 12.010^{\circ} \times 11.810^{\circ}$ at maximum by using the optional cutting module for landscape size Max. $305 \times 133.9 \text{ mm} / 12.010^{\circ} \times 5.275^{\circ}$ at maximum by using the optional cutting module for A6 size Min. $200 \times 134 \text{ mm} / 7.870^{\circ} \times 5.280^{\circ}$ Min. $148 \times 134 \text{ mm} / 5.830^{\circ} \times 5.280^{\circ}$ at minimum by using the optional cutting module Min. $148 \times 105 \text{ mm} / 5.830^{\circ} \times 4.130^{\circ}$ at minimum by using the optional cutting module for A6 size Landscape book size is A4, B5, A5, 8.5° $\times 11^{\circ}$ , $7^{\circ} \times 8.5^{\circ}$ (by using the optional cutting module for each landscape size)
Trim Width	Max. 99.9 mm / 3.930" Min. 2.0 mm / 0.080"	
Trim Height	Max. 51 mm / 2.0"	
Book Pile Height	Max. 300 mm / 11.8"	
Clamp System and Pressure	Hydraulically Operated Automatic Settings: 4kN / 5.5kN / 8kN 3 Steps Selectable Manual Settings: 1.5kN / 3kN / 5kN / 6.5kN / 8kN 5 Steps Selectable	
Production Speed	Max. 440 books per hour (Book Thickness 25 mm, 2 piled books) Max. 500 books per hour (Book Thickness 10 mm, 5 piled books)	
Voltage / Frequency	3-phase 200 V, 50 / 60 Hz 3-phase 220 V, 50 / 60 Hz 3-phase 400 V, 50 / 60 Hz	
Machine Dimensions	W2,350 x D1,160 x H1,370 mm / W92.6" x D45.7" x H54.0"	


#### **Options**

■ Variable Trimming Device V-30S: Barcoded books placed on the feed table are read, then the HT-30C automatically changes-over to the indicated size before trimming begins. This eliminates manual data input.



#### ■ Rotary Table:

A wide variety of rotary tables are available to match different trimming sizes, except for standard tables. See the right chart for details.

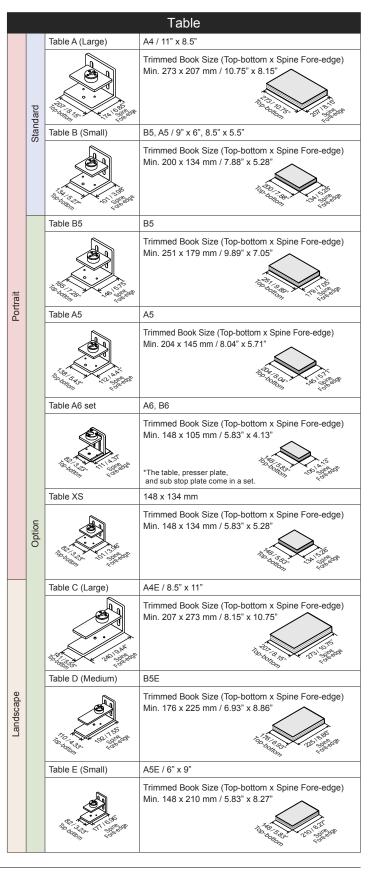

# Horizon

# HORIZON INTERNATIONAL, INC.

510 Kuze Ooyabu-cho, Minami-ku, Kyoto, 601-8206, Japan Phone: +81-(0)75-934-6700 Fax: +81-(0)75-934-6708 www.horizon.co.jp





Standard Finishing Systems, 10 Connector Road, Andover, MA 01810 877-404-4460 978-470-1920 Fax 978-470-2771 www.standardfinishing.com

<sup>\*</sup>The machine design and specifications are subject to change without any notice.